




70/63 SIDE MOUNTING



70/63

This oil tank is equipped with:
- air breather cap h 41
- round aluminium level gauge 1"
- adjustable ball valve

Mounting kit: available for side and rear position.

Notes: Filter included for EVO (ET).



Aluminium



Painted Steel
RAL 7021



Stainless
Steel

70/63 (sidewalls 706 mm h x 636 mm w)


Products range	Filter Flange	Level Indicator E = Spy eye L = Level gauge	Returns	Valve Plate	Mounting kit	Adjustable Ball Valve	LT*	Dimensions L x H x W	Material	Product Code NSOA = Aluminium NSOF = Steel NSOI = Stainless steel
Multi Function (MF)	● 135	● E	●	●	● Side / Rear	● 1"1/2	135	350 x 706 x 636	F/I	- 0135035CQRV
							150	400 x 706 x 636	A/F/I	- 0150040CQRV
							170	450 x 706 x 636	A/F/I	- 0170045CQRV
							200	500 x 706 x 636	A/F/I	- 0200050CQRV
Monobrick	●	● E	●	●	● Side	● 1"1/2	120	300 x 706 x 636	A/F	- 0120030CQRV

* Full tank capacity

● included ○ predisposed (not incl) ● not included in the standard tanks

Mounting specifics

A (mm)	Level indicator capacity (l)
300	103
350	111
400	129
450	147
500	164

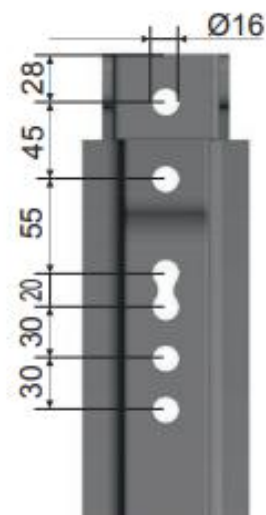

70/63 REAR MOUNTING



70/63

This oil tank is equipped with:

- air breather cap h 41
- round aluminium level gauge 1"
- adjustable ball valve

Mounting kit: available for side and rear position.

Notes: Filter included for EVO (ET).




Aluminium



Painted Steel
RAL 7021



Stainless
Steel



70/63 (sidewalls 706 mm h x 636 mm w)

Products range	Filter Flange	Level Indicator E = Spy eye L = Level gauge	Returns	Valve Plate	Mounting kit	Adjustable Ball Valve	LT*	Dimensions L x H x W	Material	Product Code NSOA = Aluminium NSOF = Steel NSOI = Stainless steel
Multi Function (MF)	● 135	● E	●	●	● Side / Rear	● 1"1/2	135	350 x 706 x 636	F/I	- 0135035C0RV
							150	400 x 706 x 636	A/F/I	- 0150040C0RV
							170	450 x 706 x 636	A/F/I	- 0170045C0RV
							200	500 x 706 x 636	A/F/I	- 0200050C0RV

* Full tank capacity

● included ○ predisposed (not incl) ● not included in the standard tanks

Mounting specifics

A (mm)	Level indicator capacity (l)
300	103
350	111
400	129
450	147
500	164

