


Main Dimensions

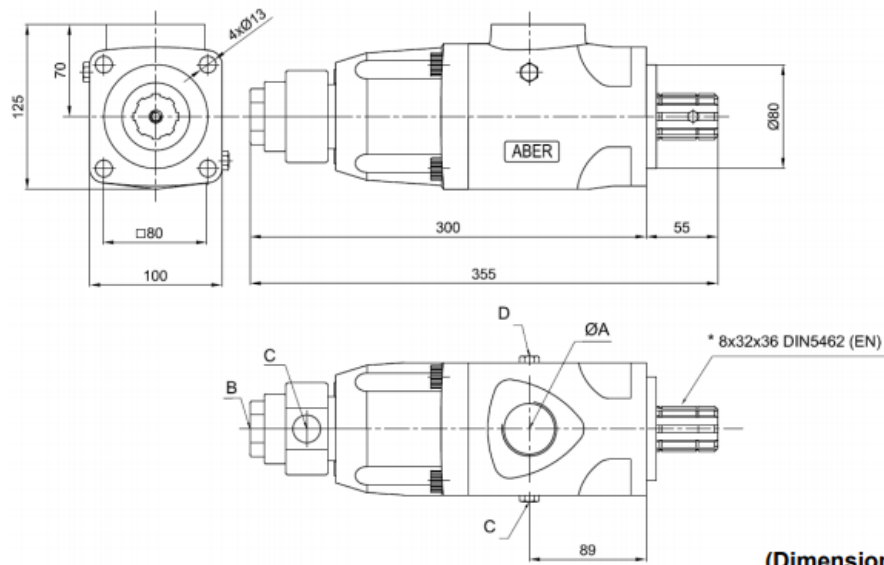


(Dimensions in mm)

Main Data

Main Data						
Pumps BHD_EN	20+20		25+25		30+30	
	B	C	B	C	B	C
Displacement (cm ³ /rot.)	20	20	25	25	30	30
Output at max. rotation (l/min)	40	40	45	45	45	45
Operating pressure (bar up to)	300		300		300	
Peak pressure (bar)	350		350		350	
Rotation min. (rpm)	200		200		200	
Rotation máx. (rpm)	2000		1800		1500	
Weight (kg)	13		14		14	
Sense of Rotation	Bi-directional					
A - Oil inlet (BSP)	1"1/4		1"1/4		1"1/4	
B - Oil outlet (BSP)	3/4"		3/4"		3/4"	
C - Oil outlet (BSP)	3/4"		3/4"		3/4"	
D	Oil drain plug					

Main Dimensions

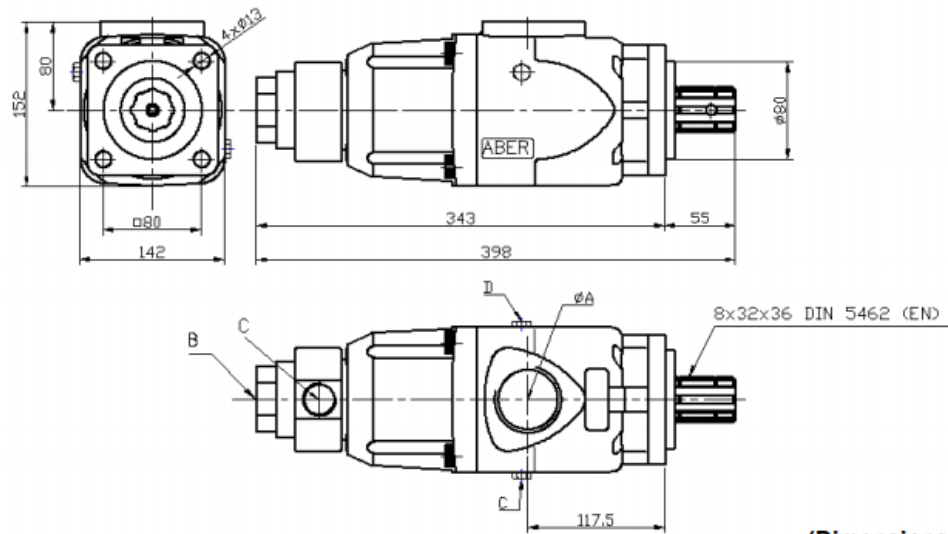

(Dimensions in mm)

Main Data

Pumps BHD_EN	40+40		45+45		50+50		53+53		60+30		65+22		72+38		80+21		80+27		83+42	
	B	C	B	C	B	C	B	C	B	C	B	C	B	C	B	C	B	C	B	C
Displacement (cm ³ /rot.)	40	40	45	45	50	50	53	53	60	30	65	22	72	38	80	21	80	27	83	42
Output at max. rotation (l/min)	60	60	72	72	60	60	66	66	90	45	104	35	86	46	100	26	100	34	83	42
Operating pressure (bar up to)	300		400		250		300		300		400		250		300		300		250	
Peak pressure (bar)	350		450		300		350		350		450		300		350		350		300	
Rotation min. (rpm)	200		200		200		200		200		200		200		200		200		200	
Rotation máx. (rpm)	1500		1600		1200		1250		1500		1600		1200		1250		1250		1000	
Weight (kg)	23		24		23		24		23		24		23		24		24		23	
Sense of Rotation	Bi-directional																			
A - Oil inlet (BSP)	2"		2"		2"		2"		2"		2"		2"		2"		2"		2"	
B - Oil outlet (BSP)	3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"	
C - Oil outlet (BSP)	3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"	
D	Oil drain plug																			